

SWINE WASTEWATER TREATMENT IN CONSTRUCTED WETLANDS

P. G. Hunt, F. J. Humenik, A. A. Szögi, J. M. Rice, K. C. Stone, and E. J. Sadler*

ABSTRACT

Swine production, a major enterprise in the Eastern Coastal Plain, has substantial waste generation and disposal considerations. Constructed wetlands have received considerable interest as a method of swine wastewater treatment that could decrease the amount of land required for application of wastewater. This study was undertaken to investigate the capacity of constructed wetlands that contained either natural wetland plants or water tolerant agronomic plants to treat swine wastewater. Six wetland cells (4 x 30 m) were constructed in Duplin Co., NC, in 1992. One set of two cells contained rush and bulrushes, and another set of two cells contained bur-reed and cattails. The third set of two cells contained flooded rice and soybean grown in saturated-soil culture. A nitrogen loading rate of 3 kg ha⁻¹ day⁻¹ was used during the initial four months; plant growth was excellent. The redox conditions of the wetland soils during this start-up period were highly reducing. These reducing conditions may inhibit N loss by nitrification and denitrification as well as decrease the long-term phosphorus removal efficiency. However, during this initial period, treated effluent concentrations of nitrogen and phosphorus were low and could have met discharge requirements in some areas. Rice yield was 2.8 Mg ha⁻¹, and group V and VI soybean yielded 1.9 and 3.3 Mg ha⁻¹, respectively. Long-term data over annual cycles for varying crop and hydraulic conditions are needed to assess the treatment sustainability.

KEYWORDS. Nitrogen, Phosphorus, Redox potential, Rice, Saturated culture soybean

INTRODUCTION

Constructed wetlands with either surface or subsurface flow and various vegetation (e.g. cattails, rushes, or reeds) have received considerable interest as methods of wastewater treatment (Hammer, 1989 and Reed, 1993). Since wetlands can effectively treat hydraulic loads of a few or several thousand m³/d, they represent a method of advanced wastewater treatment for municipalities, industries, agriculture, parks, and homes. Properly designed and operated wetlands have the potential to reduce land requirements relative to other methods of natural treatment of wastewater, such as crop land irrigation. However, a consensus does not exist on the proper design and operation of wetlands for municipal or domestic wastewaters (Reed, 1993). This lack of consensus is even more apparent for the wide range of agriculture wastewaters, but pressing needs for wastewater treatment, popular press discussion of wetland treatment, and producer demands for cost effective methods have emphasized the need for more definitive design and performance data.

Swine production has become a major enterprise in the Eastern Coastal Plain. In 1990, Sampson Co., NC, and contiguous Duplin Co. were the largest and third-largest swine

* P. G. Hunt, Research Leader and Soil Scientist, A. A. Szögi, Soil Scientist, K. C. Stone, Agricultural Engineer, and E. J. Sadler, Soil Scientist, US Department of Agriculture, Agricultural Research Service, Coastal Plains Soil, Water and Plant Research Center, Florence, SC; and F. J. Humenik, Professor, and J. M. Rice, Agricultural Engineer, Agricultural Engineering Dept., NC State University, Raleigh, NC.

producing counties in the USA, respectively (NC Agric. Stat. Div., 1990). Swine wastewaters are highly concentrated in nutrients (C, N, and P), and their liquid nature makes the cost of transporting or pumping very expensive. Thus, disposal can be a difficult problem for producers that have limited land near their swine operations. Wastewater disposal must be done in a reliable and sustainable manner to avoid significant environmental damage to shallow ground waters and nutrient-sensitive streams of the coastal environment (Evans et al., 1984; Hubbard and Sheridan, 1989; and Stone et al. 1989 and 1992).

Questions exist about the long-term efficiency of constructed wetlands for swine wastewater treatment: specifically, questions exist about loading rates, oxidative/reductive conditions, denitrification potential, phosphorous removal efficiency, and ammonia toxicity to wetland plants. This study was undertaken to investigate the capacity of constructed wetlands that contained either natural wetland plants or water tolerant agronomic plants to treat swine wastewater.

MATERIALS AND METHODS

Wetland Cell Layout

Six, 4 x 30-m, wetland cells were constructed in Duplin Co., NC, in 1992 for swine wastewater treatment. The six-cells were divided into three parallel sets of two end-on-end cells (Fig. 1). The cell bottoms and side walls were lined with clay, which was covered with 20 to 30 cm of loamy sand soil.

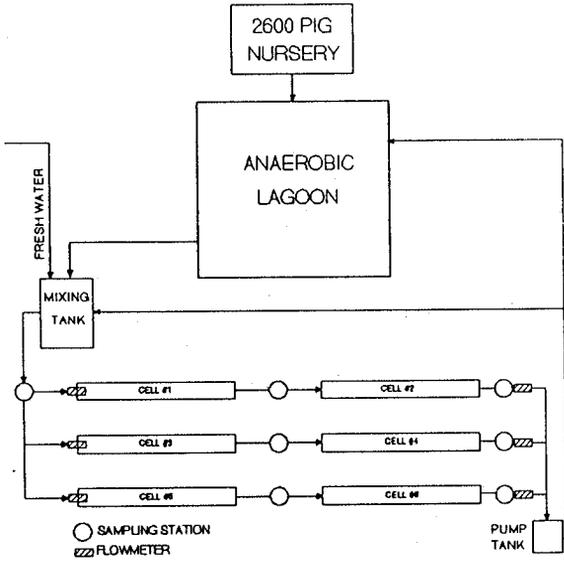


Figure 1. A schematic of the pig nursery, lagoon and constructed wetlands.

Monitoring Equipment**

Six V-notch weirs and six PDS-350 ultrasonic open-channel flowmeters (Control Electronics, Morgantown, PA) were installed at the inlet and outlet of each set of cells. A CR7X data logger (Campbell Scientific, Logan, UT) with three multiplexers was installed for hourly data acquisition of flow, weather parameters, and soil redox potential. Seven ISCO 2700 (ISCO, Lincoln, NE) samplers were installed. One sampler collected samples of the wastewater inflow, and the other six sampled the water at the end of each single cell. The water sampler combined hourly samples into daily composites.

Plant Materials

Four cells were planted to natural wetland vegetation in 1992. One set of two cells (two cells end-on-end) contained rush (*Juncus effusus*) and bulrushes (*Scirpus americanus*, *Scirpus cyperinus* and *Scirpus validus*), and another set of two cells contained bur-reed (*Sparganium americanum*) and cattails (*Typha angustifolia* and *Typha latifolia*). The third set of two cells contained agronomic crops. One cell contained soybean (*Glycine max*) grown in saturated-soil culture on 1-m-wide beds that were surrounded by ditches of approximately 10-cm depth (Cooper et al., 1992 and Nathanson et al., 1984). Water level in the ditches was held at about 5 cm below the surface. Group V (cvs. Essex, Holladay, and Hutcheson) and group VI (cvs. Brim, Centennial, and Young) soybean cultivars were planted in 18-cm wide rows. The other agronomic cell contained flooded rice (*Oryza sativa* cv. Maybelle). Both agronomic crops were planted in May 1993, and plant densities were 750,000 plants ha⁻¹ in both cases.

Physico-Chemical Analysis

Water samples were analyzed for electrical conductivity (EC) and pH by electrometric methods. Nitrate-nitrogen (NO₃-N), ammonia-nitrogen (NH₃-N), total Kjeldahl nitrogen (TKN), ortho-phosphate (o-PO₄), total phosphorus (TP), total solids (TS), total organic carbon (TOC), and volatile solids (VS) analyses were done in accordance with the USEPA recommended methodology by use of a TRAACS 800 Auto-Analyzer (Kopp and McKee, 1983). Soluble organic carbon (SOC) was analyzed with a Dhorman DC-190 carbon (C) analyzer (Rosemount, Santa Clara, CA), and chemical oxygen demand (COD) was analyzed by use of the Hach method (Gibbs, 1979). Soil redox potential was monitored continuously with a total of ninety Pt electrodes arranged in three clusters of five electrodes per cell with one Ag/AgCl reference electrode per cluster (Faulkner et al., 1989). Redox potential readings were taken every five minutes, averaged every hour and stored in the CR7X data logger. Redox readings were adjusted to the standard hydrogen electrode (Eh) by adding 200 mV.

Nutrient Loads

In order to prevent the potential of damage to wetland plants it was desirable to start wastewater application to the cells with low NH₃-N loading rates. Therefore, wastewater (Table 1) was diluted to a 1:15 ratio with fresh water and applied at an N rate of 3 kg ha⁻¹ day⁻¹. This low daily N application rate required a high dilution in order to maintain the hydraulic conditions of a wetland (i.e. wastewater with 25 mg L⁻¹ N provides 3 kg ha⁻¹ day⁻¹ of N with a loading depth of only 12 mm day⁻¹). Since 6-mm hydraulic loading

** Mention of trademark, proprietary product, or vendor does not constitute a guarantee or warranty of the product by the U.S. Dept. of Agr. and does not imply its approval to the exclusion of other products or vendors that may also be suitable.

would not meet evaporation transpiration demands during the summer months, the dilution and hydraulic loading were increased as needed to maintain the wetland and the 3 kg ha⁻¹ day⁻¹ N application rate.

Table 1. Characteristics of non-diluted wastewater from the anaerobic lagoon.

PARAMETERS	UNITS	MEAN	STD. DEV.
pH		7.53	0.14
TS	(g kg ⁻¹)	1.86	0.47
VS	(g kg ⁻¹)	0.73	0.32
TOC	(mg L ⁻¹)	235	124
COD	(mg L ⁻¹)	737	237
BOD ₅	(mg L ⁻¹)	287	92
TKN	(mg L ⁻¹)	365	41
NH ₃ -N	(mg L ⁻¹)	347	52
NO ₃ -N	(mg L ⁻¹)	0.04	0.03
TP	(mg L ⁻¹)	93	11
<i>o</i> -PO ₄	(mg L ⁻¹)	80	9

RESULTS

All equipment used for pumping, diluting, and measuring flow and distribution has worked well and required little maintenance during this start-up period. The continuous flow loading was automated with float control valves in the mixing tank, which provided automated loading of the desired proportion of lagoon liquid and dilution water. Outflow from the mixing tank for loading to the wetland cells was controlled by valves, which were periodically manually adjusted. Effluent from all three wetland series was pumped back to the lagoon in order to avoid any problems with discharge requirements. Since the wetlands could treat only a small portion of the lagoon wastewater, most of the wastewater was pumped onto crop land as needed for storage space during the summer. Neither odors nor mosquitos were a problem.

During periods of high temperatures and low rainfall, standing water (4 to 8 cm) was not maintained throughout cells 2 and 4. Vegetation planted in cells 1 and 2 remained predominant, but some intrusion of voluntary species occurred in cells 3 and 4. As temperatures lowered, standing water was maintained in all wetland cells.

A half section of 6-inch PVC pipe was used to distribute flow across the width of the constructed wetland cells. However, streaming occurred near the discharge of the second cell in each series during periods when standing water was not maintained throughout that wetland cell.

Vegetative growth in the four natural vegetation wetland cells was very good. The estimates of above ground dry matter production for cells 1, 2, 3, and 4 were 23.4, 17.9, 10.2, and 8.4 Mg ha⁻¹, respectively. The rice yield was 2.8 Mg ha⁻¹ which is an acceptable production yield. Groups V and VI soybean yielded 1.9 and 3.3 Mg ha⁻¹, respectively. Soybean yields were not as high as those reported by Cooper (1992), but there were substantial cultivar differences including some high yields. Young soybean yielded 3.8 Mg ha⁻¹. Thus, it appears that there is genetic variability for high yield potential of soybean in saturated culture when swine wastewater is used for irrigation.

The electrical conductivity (EC) of the applied wastewater was significantly lowered by flow through all of the wetland cells (data not shown). This decreased EC indicated that there was a lowering of total electrolytes - probably by several mechanisms including precipitation, soil fixation, plant uptake, incorporation into soil organic matter, ammonia volatilization, and denitrification.

Average daily pH values ranged from 7.5 to 8.1. However, higher pH values may have occurred as a result of diurnal algal activity. These higher short-term pH values together with high summer temperatures could have induced some $\text{NH}_3\text{-N}$ volatilization.

Soluble organic C concentrations indicated that energy was available to establish strong anaerobic conditions; the inflow mean was 12 mg L^{-1} , and the outflow ranged from 7 to 17 mg L^{-1} . Wide temporal ranges were observed because the anaerobic lagoon effluent and wetland waters were sometimes significantly diluted by rainfall. Redox potentials indicated strong reducing conditions in all wetland cells (Table 2). These conditions were unfavorable for nitrification. Thus, $\text{NH}_3\text{-N}$ remained the prevalent nitrogen form. Limited nitrification also prevented significant subsequent loss of nitrogen by denitrification. The reducing conditions, lack of nitrification and denitrification, and high ammonia-N have been reported to be significant problems for treatment of municipal wastewater in constructed wetlands throughout the USA (Reed, 1993).

Ammonia-N concentrations in the wastewater decreased from 21 mg L^{-1} to $< 4 \text{ mg L}^{-1}$ after treatment in the rush/bulrushes (cells 1 and 2) and bur-reed/cattails (cells 3 and 4), and it decreased to $< 1 \text{ mg L}^{-1}$ after treatment in the soybean and rice cells (Table 3). The mass removal of ammonia-N by wetlands with all three vegetative communities was over 99% in all cells. The substantial decrease was probably from plant absorption and $\text{NH}_3\text{-N}$ volatilization. However, some of the ammonia-N may have been nitrified especially in the soybean and rice cells.

Nitrate-N concentrations were low in the inflow wastewater because of the anaerobic conditions of the lagoon. Very little nitrate-N was accumulated in the treated wastewaters; inflow and outflow concentrations were < 1.0 and < 0.1 , respectively. These low nitrate-N concentrations along with the low redox conditions and the presence of ammonia-N suggest that very little nitrification/denitrification occurred. However, in wetlands, nitrification and denitrification occurs at the interface of anaerobic and anaerobic zones and more detailed measurements are needed before a firm conclusion can be made about the extent of nitrate-N loss by denitrification.

It appeared that even the highly diluted swine wastewater in the free-water-surface wetlands caused sufficient oxygen demand and diffusion reduction to prevent the aerobic process of nitrification. Thus, an oxidative step seems necessary. This oxidation could be accomplished by treatment of the wastewater via overland flow. In overland flow the water film is only a few mm thick and in close contact with the nitrifying population of the soil surface. Thus, nitrification should occur rapidly, particularly if overland flow was done after treatment in the wetland cell had reduced the organic content of the wastewater.

In the wastewater, phosphorus was present mostly in the form of orthophosphate (Table 4). We believe that its effective removal was predominately by plant uptake, precipitation, and sorption to the soil substrate. Mass removal by wetland with all three vegetative communities was over 99%.

Table 2. Soil redox potential (Eh) ranges for every wetland cell (June - September 1993).

CELL	Eh RANGE (mV) ^a
1	150 to -240
2	240 to -240
3	100 to -240
4	280 to -220
5	400 to -250
6	165 to -235

* Nitrate is normally absent when soil Eh is below 300 mV.

Table 3. Mean, standard deviation, and range for NH₃-N of daily composite wastewater samples (June - September 1993).

PLANTS	SAMPLER	MEAN (mg L ⁻¹)	STD. DEV. (mg L ⁻¹)	RANGE (mg L ⁻¹)
	INFLOW	21	6	6.0 - 31
J/S ^a	CELL 1	4	4	0.3 - 13
	CELL 2	2	4	0.3 - 11
S/T ^b	CELL 3	3	3	0.1 - 10
	CELL 4	2	2	0.1 - 4
SOYBEAN	CELL 5	8	6	1.0 - 14
RICE	CELL 6	0.2	0.1	0.1 - 0.3

^a J/S = *Juncus* sp. and *Scirpus* sp.

^b S/T = *Sparganium* sp. and *Typha* sp.

Table 4. Mean, standard deviation and range for o-PO₄ of daily composite wastewater samples (June - September 1993).

PLANTS	SAMPLER	MEAN (mg L ⁻¹)	STD. DEV. (mg L ⁻¹)	RANGE (mg L ⁻¹)
	INFLOW	4.0	0.8	3.0 - 5.0
J/S ^a	CELL 1	1.0	0.6	0.2 - 2.0
	CELL 2	0.2	0.1	0.1 - 0.2
S/T ^b	CELL 3	0.7	0.6	0.2 - 2.0
	CELL 4	0.1	0.1	0.1 - 0.2
SOYBEAN	CELL 5	2.0	0.4	2.0 - 3.0
RICE	CELL 6	0.3	0.2	0.2 - 0.5

^a J/S = *Juncus* sp. and *Scirpus* sp.

^b S/T = *Sparganium* sp. and *Typha* sp.

SUMMARY

Growth of the rushes, bulrushes, bur-reed, and cattails was very good. Rice yield was 2.8 Mg ha⁻¹, and groups V and VI soybean yielded 1.9 and 3.3 Mg ha⁻¹, respectively.

The low N loading rate of 3 kg ha⁻¹ day⁻¹ was chosen because it is a currently recommended level and wetlands with higher loading rates have not been producing an effluent that could be stream discharged. The preliminary results presented are for this loading rate during a four-month period with excellent plant growth. The treated effluent concentrations of nitrogen and phosphorus were low and could have met discharge requirements in some areas; however, longer term research including dormant plant periods is still needed. Phosphorus is of concern on a long-term basis since the highly reducing conditions may lower the removal efficiency.

The redox conditions of wetland soil during this start-up period were highly reduced. The presence of ammonia-N in the discharge effluent and the very low concentrations of nitrate-N throughout the wetlands suggest that the cell did not support nitrification which must occur before removal of nitrogen by denitrification. However, nitrification and denitrification in wetlands occur at the interface of anaerobic and aerobic zones, and more detailed measurements are needed before a firm conclusion can be made about the extent of nitrate-N loss by denitrification.

In any case, an oxidative component and a reductive component in sequence will be necessary for nitrogen removal. If it does not occur in the natural wastewater-plant-soil interface of the wetland cell, it could be produced by construction of an oxidative component and recycling of the effluent. Long-term data over annual cycles for varying crop and hydraulic conditions will be necessary to determine if constructed wetlands can produce a dischargeable or significantly weakened swine wastewater effluent so that less land will be required for wastewater management.

REFERENCES

1. Cooper, R. L., N. R. Fausey, and J. G. Streeter. 1992. Crop management to maximize the yield response of soybeans to a subirrigation/drainage system. pp. 466-473. *IN* Drainage and Watertable Control. Proceedings of the Sixth International Drainage Symposium. Am. Soc. Agric. Eng., St. Joseph, MI.
2. Evans, R. O., P. W. Westerman, and M. R. Overcash. 1984. Subsurface drainage water quality from land application of swine lagoon effluent. *Trans. ASAE* 27:473-480.
3. Faulkner, S. P., W. H. Patrick, Jr. and R. P. Gambrell. 1989. Field techniques for measuring wetland soil parameters. *Soil Sci. Soc. Am. J.* 53:883-890.
4. Gibbs, C. R. 1979. Introduction to Chemical Oxygen Demand. Technical Information Series -- Booklet No. 8. Hach Technical Center for Applied Analytical Chemistry. pp. 1-16. Hach Company. Loveland, Colorado (USEPA-Approved for NPDES reporting. *Federal Register*, Vol. 45, No. 78, Monday April 30, 1980, page 26811).
5. Hammer, D. A. (Ed.). 1989. *Constructed wetlands for wastewater treatment: Municipal, industrial, and agricultural.* Lewis Publishers, Chelsea, MI. 831 p.
6. Hubbard, R. K. and J. M. Sheridan. 1989. Nitrate movement in groundwater in the Southeastern Coastal Plain. *J. Soil and Water Cons.* 44:20-27.

7. Kopp, J. F. and G. D. McKee. 1983. Methods for chemical analysis of water and wastes. USEPA Report No. EPA-600/4-79020. Environmental Monitoring and Support Lab., Office of Research and Development, U.S. Environmental Protection Agency, Cincinnati, OH. 521 p.
8. Nathanson, K., R. J. Lawn, P. L. M. DeJabrun, and D. E. Byth. 1984. Growth, nodulation, and nitrogen accumulation by soybean in saturated soil culture. *Field Crops Res.* 8:73-92.
9. North Carolina Agriculture Statistics Div. 1990. North Carolina agricultural statistics, 1990. Raleigh, NC. 76 p.
10. Reed, S.C. 1993. Subsurface flow constructed wetlands for wastewater treatment: Technology assessment. EPA-832-R-93-001. Office of Water, USEPA, Wash., DC.
11. Stone, K. C., K. L. Campbell, and L. B. Baldwin. 1989. A microcomputer model for design of agricultural stormwater management systems in Florida's flatwoods. *Trans. ASAE* 32:545-550.
12. Stone, K. C., R. C. Sommers, G. H. Williams, and D. E. Hawkins. 1992. Implementation of water table management in the Eastern Coastal Plain. *J. Soil and Water Conservation* 47:47-51.

ACKNOWLEDGMENT

We would like to thank the pig nursery owners, Gerald and Paulette Knowles, for permission to work on their farm and for their cooperative attitude. We would also like to thank Murphy farms, particularly Mr. Gary Scaff, for assistance with construction and operational issues of the wetlands.